

YIELD ASSESSMENT OF THE PHOTOVOLTAIC POWER PLANT

Report number: PV-324-1305-1084
 Issued: 29 May 2013 07:45 CET (GMT +0100)

1. Site info

Site name: **Nughedu Santa Vittoria**
 Province of Oristano, Sardinia, Taliansko

Coordinates: **40° 07' 15.15" N, 09° 0' 46.41" E**

Elevation a.s.l.: 181 m

Slope inclination: 4°

Slope azimuth: 345° north

Annual global in-plane irradiation: **1851 kWh/m²**
 Annual air temperature at 2 m: **14.5 °C**

Location on the map: <http://solargis.info/imaps/#loc=40.120875,9.012893&tl=Google:Satellite&z=12>

2. PV system info

Installed power: **1.0 kWp**

Type of modules: **crystalline silicon (c-Si)**

Mounting system: **fixed mounting, free standing**

Azimuth/inclination: **180° (south) / 30°**



Inverter Euro eff.: 97.5%

DC / AC losses: 5.5% / 1.5%

Availability: 99.0%



Annual average electricity production: **1461 kWh**
 Average performance ratio: **77.9%**

3. Geographic position

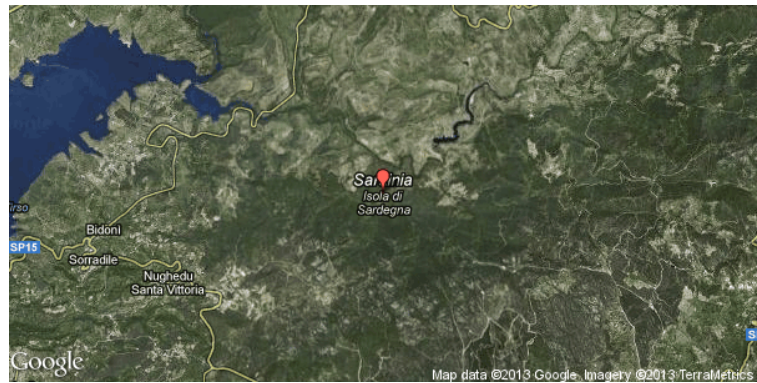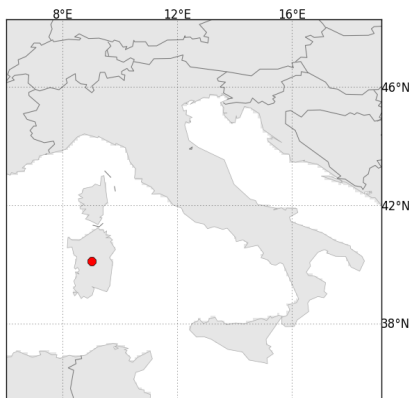

Google Maps © 2013 Google

4. Terrain horizon and day length

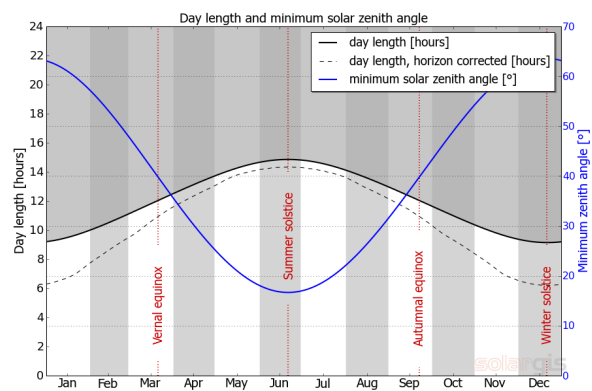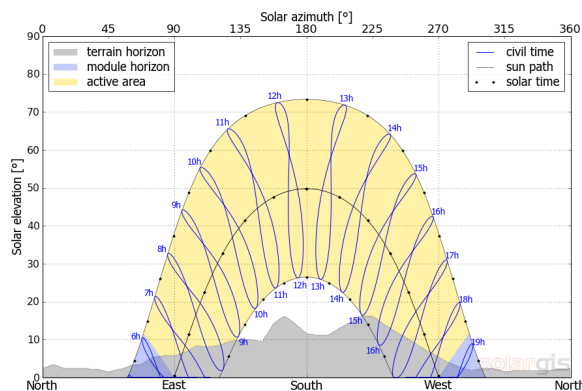


Left: Path of the Sun over a year. Terrain horizon (drawn by grey filling) and module horizon (blue filling) may have shading effect on solar radiation. Black dots show True Solar Time. Blue labels show Local Clock Time.

Right: Change of the day length and solar zenith angle during a year. The local day length (time when the Sun is above the horizon) is shorter compared to the astronomical day length, if obstructed by higher terrain horizon.

Site: Nughedu Santa Vittoria, Taliansko, lat/lon: 40.1209°/9.0129°
 PV system: 1.0 kWp, crystalline silicon, fixed free, azim. 180° (south), inclination 30°

5. Global horizontal irradiation and air temperature - climate reference

Month	Gh _m	Gh _d	Dh _d	T ₂₄
Jan	59	1.89	0.91	6.5
Feb	78	2.79	1.27	6.8
Mar	132	4.25	1.75	9.2
Apr	151	5.03	2.19	11.4
May	197	6.35	2.49	16.6
Jun	219	7.30	2.41	21.0
Jul	237	7.65	2.22	24.2
Aug	201	6.50	2.12	24.1
Sep	142	4.75	1.96	19.5
Oct	105	3.38	1.51	15.9
Nov	62	2.08	1.05	10.8
Dec	49	1.57	0.84	7.7
Year	1632	4.47	1.73	14.5

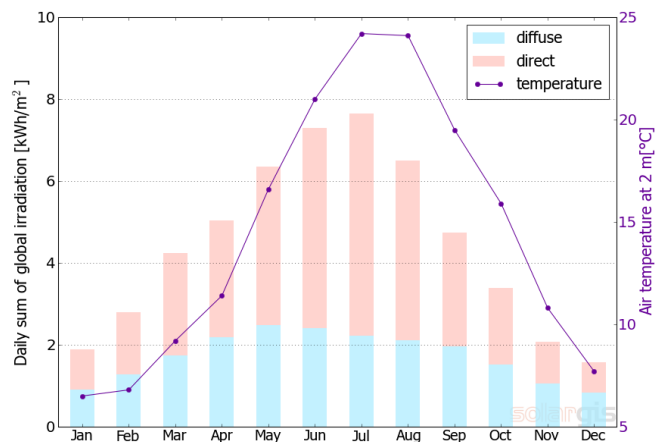


Long-term monthly averages:

- Gh_m Monthly sum of global irradiation [kWh/m²]
- Gh_d Daily sum of global irradiation [kWh/m²]
- Dh_d Daily sum of diffuse irradiation [kWh/m²]
- T₂₄ Daily (diurnal) air temperature [°C]

6. Global in-plane irradiation

Fixed surface, azimuth 180° (south), inclination. 30°

Month	Gi _m	Gi _d	Di _d	Ri _d	Sh _{loss}
Jan	90	2.90	1.05	0.02	7.0
Feb	109	3.89	1.43	0.02	2.4
Mar	163	5.26	1.92	0.04	0.3
Apr	164	5.47	2.27	0.04	0.0
May	196	6.33	2.49	0.05	0.0
Jun	209	6.97	2.39	0.06	0.0
Jul	232	7.47	2.25	0.06	0.0
Aug	214	6.91	2.23	0.05	0.0
Sep	168	5.59	2.12	0.04	0.1
Oct	140	4.51	1.71	0.03	1.1
Nov	91	3.04	1.19	0.02	5.1
Dec	75	2.41	0.96	0.01	8.8
Year	1851	5.07	1.84	0.04	2.1

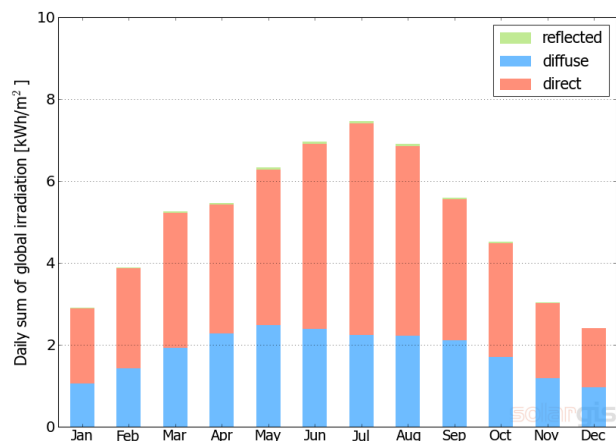

Long-term monthly averages:

- Gi_m Monthly sum of global irradiation [kWh/m²]
- Gi_d Daily sum of global irradiation [kWh/m²]
- Di_d Daily sum of diffuse irradiation [kWh/m²]
- Ri_d Daily sum of reflected irradiation [kWh/m²]


Sh_{loss} Losses of global irradiation by terrain shading [%]

Average yearly sum of global irradiation for different types of surface:


	kWh/m ²	relative to optimally inclined
Horizontal	1632	88.2%
Optimally inclined (32°)	1851	100.0%
2-axis tracking	2403	129.8%
Your option	1851	100.0%

Site: Nughedu Santa Vittoria, Taliasko, lat/lon: 40.1209°/9.0129°
 PV system: 1.0 kWp, crystalline silicon, fixed free, azim. 180° (south), inclination 30°

7. PV electricity production in the start-up



Month	E_{s_m}	E_{s_d}	E_{t_m}	E_{share}	PR
Jan	75	2.44	76	5.2	78.2
Feb	91	3.26	91	6.2	81.8
Mar	133	4.32	134	9.2	81.7
Apr	132	4.41	132	9.1	80.5
May	153	4.95	153	10.5	78.2
Jun	159	5.31	159	10.9	76.3
Jul	173	5.60	174	11.9	74.9
Aug	160	5.19	161	11.0	75.1
Sep	130	4.35	130	8.9	77.7
Oct	112	3.61	112	7.7	79.2
Nov	75	2.51	75	5.2	78.4
Dec	62	2.02	63	4.3	76.5
Year	1460	4.00	1461	100.0	77.9

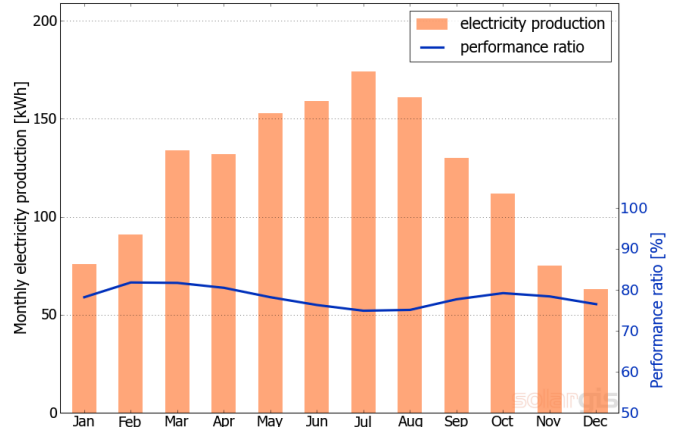

Long-term monthly averages:

- E_{s_m} Monthly sum of specific electricity prod. [kWh/kWp]
- E_{s_d} Daily sum of specific electricity prod. [kWh/kWp]
- E_{t_m} Monthly sum of total electricity prod. [kWh]
- E_{share} Percentual share of monthly electricity prod. [%]
- PR Performance ratio [%]

8. System losses and performance ratio

Energy conversion step	Energy output [kWh/kWp]	Energy loss [kWh/kWp]	Energy loss [%]	Performance ratio	
				[partial %]	[cumul. %]
1. Global in-plane irradiation (input)	1875	-	-	100.0	100.0
2. Global irradiation reduced by terrain shading	1851	-24	-1.3	98.7	98.7
3. Global irradiation reduced by reflectivity	1799	-52	-2.8	97.2	95.9
4. Conversion to DC in the modules	1626	-173	-9.6	90.4	86.7
5. Other DC losses	1536	-90	-5.5	94.5	81.9
6. Inverters (DC/AC conversion)	1498	-38	-2.5	97.5	79.9
7. Transformer and AC cabling losses	1475	-23	-1.5	98.5	78.7
8. Reduced availability	1461	-14	-0.9	99.1	77.9
Total system performance	1461	-414	-22.1	-	77.9

Energy conversion steps and losses:

- Initial production at Standard Test Conditions (STC) is assumed,
- Reduction of global in-plane irradiation due to obstruction of terrain horizon and PV modules,
- Proportion of global irradiation that is reflected by surface of PV modules (typically glass),
- Losses in PV modules due to conversion of solar radiation to DC electricity; deviation of module efficiency from STC,
- DC losses: this step assumes integrated effect of mismatch between PV modules, heat losses in interconnections and cables, losses due to dirt, snow, icing and soiling, and self-shading of PV modules,
- This step considers euro efficiency to approximate average losses in the inverter,
- Losses in AC section and transformer (where applicable) depend on the system architecture,
- Availability parameter assumes losses due to downtime caused by maintenance or failures.

Losses at steps 2 to 4 are numerically modeled by pvPlanner. Losses at steps 5 to 8 are to be assessed by a user. The simulation models have inherent uncertainties that are not discussed in this report. Read more about simulation methods and related uncertainties to evaluate possible risks at <http://solargis.info/doc/pvplanner/>.

Site: Nughedu Santa Vittoria, Taliansko, lat/lon: 40.1209°/9.0129°
PV system: 1.0 kWp, crystalline silicon, fixed free, azim. 180° (south), inclination 30°

9. SolarGIS v1.8 - description of the database

SolarGIS is high-resolution climate database operated by GeoModel Solar. Primary data layers include solar radiation, air temperature and terrain (elevation, horizon).

Air temperature at 2 m: developed from the CFSR and GFS data (© NOAA NCEP, USA); years: 1994 - 2011; recalculated to 15-minute values. The data are spatially enhanced to 1 km resolution to reflect variability induced by high resolution terrain.

Solar radiation: calculated from the satellite and atmospheric data:

- Meteosat PRIME satellite (© EUMETSAT, Germany) 1994 - 2010, 15-minute or 30-minute values for Europe, Africa and Middle East,
- Meteosat IODC satellite (© EUMETSAT, Germany) 1999 - 2011, 30-minute values for Asia,
- GOES EAST satellite (© NOAA, USA) 1999 - 2011, 30-minute, partially 3-hourly values for Americas,
- MACC (© ECMWF, UK) 2003 - 2013, atmospheric data,
- GFS (© NOAA, USA), 1994 - 2013, atmospheric data.

This estimation assumes year having 365 days. Occasional deviations in calculations may occur as a result of mathematical rounding and cannot be considered as a defect of algorithms. More information about the applied data, algorithms and uncertainty can be found at: <http://solargis.info/doc/pvplanner/>.

10. Service provider

GeoModel Solar s.r.o. , Milana Marečka 3, 84107 Bratislava, Slovakia; Registration ID: 45 354 766, VAT Number: SK2022962766;
Registration: Business register, District Court Bratislava I, Section Sro, File 62765/B

11. Mode of use

This report shows solar power estimation in the start-up phase of a PV system. The estimates are accurate enough for small and medium-size PV systems. For suntracking simulations, only theoretical options are shown without considering backtracking and shading. For large projects planning and financing, more information is needed:

1. Statistical distribution and uncertainty of solar radiation
2. Detailed specification of a PV system
3. Interannual variability and P90 uncertainty of PV production
4. Lifetime energy production considering performance degradation of PV components.

More information about full PV yield assessment can be found at: <http://solargis.info/doc/8>.

12. Disclaimer and legal information

Considering the nature of climate fluctuations, interannual and long-term changes, as well as the uncertainty of measurements and calculations, GeoModel Solar cannot take full guarantee of the accuracy of estimates. The maximum possible has been done for the assessment of climate conditions based on the best available data, software and knowledge. GeoModel Solar shall not be liable for any direct, incidental, consequential, indirect or punitive damages arising or alleged to have arisen out of use of the provided report.

This report is copyright to © 2013 GeoModel Solar, all rights reserved.
SolarGIS® is a trade mark of GeoModel Solar

13. Contact information

This report has been generated by ETOP - TRADING, a.s., Streženická 1023, 020 01 Púchov, Slovakia, <http://+421/42/46 501 65>